

pulse OXIMETER



PO-100BV

Veterinary Pulse Oximeter

pulse OXIMETER


PO-100BV

Veterinary Pulse Oximeter

- LCD display
- RTC (Real Time Clock) display
- Backlight control and automatic power-off function for power saving
- SpO₂ and Pulse rate measurement
- Display numeric and waveform of SpO₂ simultaneously
- Long battery life-up to 48 hours on 4 "AA" or 36 hours on
- Ni-MH rechargeable batteries
- Powerful data storage capacity
- Up to 300 hours SpO₂ data (1 read per 2 seconds) can be transferred to PC by Patient Care Viewer for storage, review and printing
- The latest 10 minutes trend graph and table of SpO₂ and Pulse Rate can be reviewed in the screen
- Audible and visual alarm
- Pitch tone



PC storage is easy to access through RTC and ID

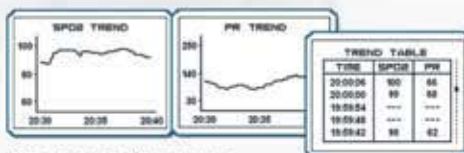

The latest 10 minutes trend graph and table of SpO₂ and Pulse Rate can be reviewed in the screen



Protective Cover



PO-100BV provides up to 100 IDs and 300 hours data storage capacity for continuous monitoring, all data can be transferred to PC through DB9 interface for storage, review and printing.



Navigating buttons for operation
Multisite Pulse Oximetry Sensor & Veterinary Sensor Clip

PO-100BV Veterinary Pulse Oximeter

Specifications

Classification

Type of Protection	Internally powered equipment (on battery power)
EMC Compliance	Class B
Degree of Protection	Type BF-Applied part
Mode of operation	Continuous
Enclosure Degree of ingress Protection	IPX2

Size and Weight

Size	160 (L)×70 (W)×37.6(H) (mm)
Weight	165g (without batteries)

Environment

Temperature	
Working	5°C ~ 40°C
Storage/Shipping	-20°C ~ 55°C

Humidity

Working	25% ~ 80% (Non-condensing)
Storage/Shipping	25% ~ 93% (Non-condensing)

Display

PO-100BV	128*64 dot-matrixes LCD, with white LED backlight
----------	--

Charger Stand

Input voltage	100 to 240V AC, 50/60Hz
Output voltage	8V DC
Output current	0.8A
Output power	6.4W



Battery

Ni-MH rechargeable battery package	
Quantity	1
Total rated voltage	4.8V
Capacity	1800 mAh
Typical battery life	36 hours
Charge time	2.5 hours to 80% 4 hours to 100%
Alkaline batteries	
Typical battery life	4 pieces 1.5V AA 48 hours

Measuring Parameter Specification

Measurement range	
SpO ₂	0 -100 %
PR	30 -350 BPM
Accuracy Tolerance	
Saturation	
Normal condition	±2% (70%-100%)
Pulase Rate	
Normal condition	±3 BPM
Resolution	
SpO ₂ resolution	1%
PR resolution	1BPM



Advanced Instrumentations, Inc.
6800 N.W. 77 Court Miami, Florida 33166 U.S.A.
Tel: 305 477 6331 Fax: 305 477 5351
www.advanced-inst.com

Distributor: